



Mechanically operated vertical axis disc for cutting fruit tree trunks. Up to 150-200 mm in diameter.

Mechanical transmission by power take-off for tractors between 70 and 105 HP.


Requiring a double effect hydraulic's service for the slope and a simple effect service for the hydropneumatic suspension.

CHARACTERISTICS

- ▶ 3 point hitch - cat. II.
- ▶ Cutting width of 1,200 mm (47 inches).
- ▶ Backwardation from the axis of the tractor of 3,100 mm (122 inches).
- ▶ Length for the transport of 3,000 mm (118 inches).
- ▶ 24 tooth HighCut disc.
- ▶ Mechanical transmission by power take-off.
- ▶ Pushing control by hydropneumatic suspension (adjustable).
- ▶ Hydraulic recovery control (adjustable).
- ▶ Hydraulic location according to the necessity activated from the tractor (1 double effect's service).
- ▶ PTO 540 rpm.
- ▶ Rubber sleeve around the plate.
- ▶ Lower bowl of control on the ground.
- ▶ Height adjustable rear wheel.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.





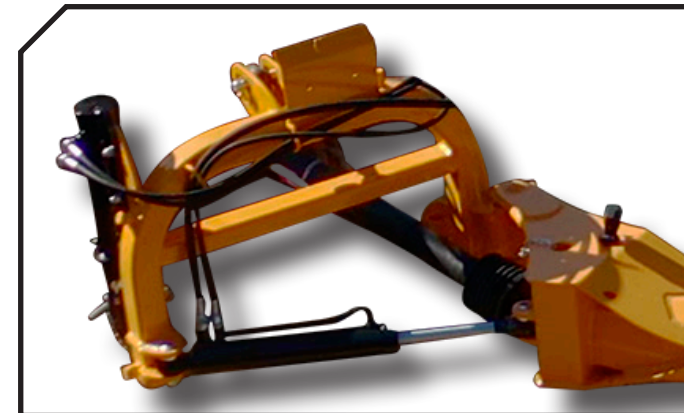





Pushing control by hydropneumatic suspension (adjustable)
Hydraulic recovery control (adjustable)



Height adjustable rear wheel



MODEL	 mm	 KW-HP		 KG	 A mm-in	 B mm-in	 C mm-in	
INTERPIQUET	3100	51 - 70 78 - 105	24	540	3000-118"	3100-122"	1200-47"	540

