



Mulcher designed for tractors between 30 HP to 80 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 50 mm.


Special configuration for frontal works.


CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 6 mm.
- ▶ Tubular rotor of Ø 400 mm.
- ▶ Gearbox with freewheel included.
- ▶ 4 XPB side belt transmission.
- ▶ Forged hammers SERRAT special "grass".
- ▶ 2 lines of counter knives screwed.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Rear height-adjustable roller Ø 152 mm.
- ▶ Double bearing on rear roller.
- ▶ Rear gum over the roller.
- ▶ Hydraulic front hood.
- ▶ PTO 540 rpm.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.




Rear gum over the roller

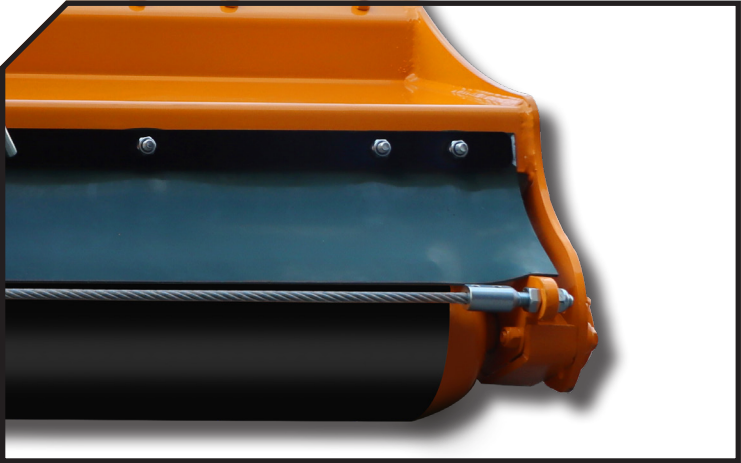

MODEL					Nº BELTS TYPE				
						A	B	C	
	mm	KW-HP		KG		mm-in	mm-in	mm-in	
T-1300	1300	22 - 30 60 - 80	9	370	4 XPB	1495-59"	1155-45"	840-33"	540
T-1400	1400	30 - 40 60 - 80	12	397	4 XPB	1595-63"	1155-45"	840-33"	540
T-1600	1600	37 - 50 60 - 80	12	420	4 XPB	1795-71"	1155-45"	840-33"	540
T-1800	1800	45 - 60 60 - 80	16	456	4 XPB	1995-79"	1155-45"	840-33"	540
T-2000	2000	52 - 70 60 - 80	16	480	4 XPB	2195-86"	1155-45"	840-33"	540


OPTIONS

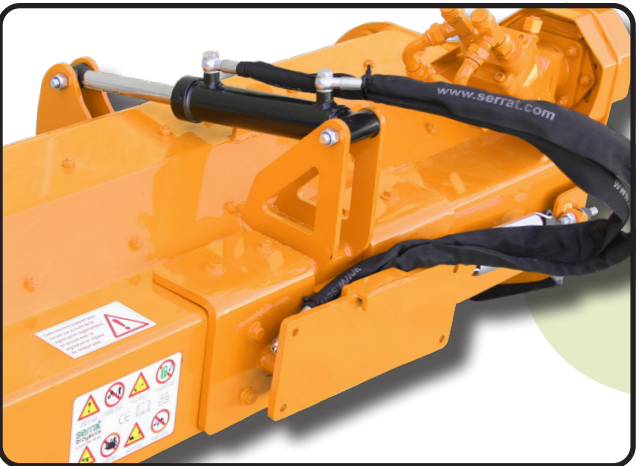

- ▶ Configuration for radio-controlled Tool Carrier
- ▶ Hydraulic side shift
- ▶ Hooking



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.