



Mulcher for extensive agriculture (maize, sorghum, sunflower, cotton and all kinds of plant residue). It incorporates rotor POLSER which, thanks to its diameter, is capable of generating a great aspiration and raising the material from the furrow. Ideal for the regeneration of meadows and grasslands. Its fixed configuration allows to position the gearbox to align the work to the axis of the tractor.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Gearbox SERRAT.
- ▶ 4 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller.
- ▶ PTO 1,000 rpm.
- ▶ 3 lines of counter hammers.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.









System antiwire in rotor



Rear height-adjustable roller




MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE							
						A mm	A in	B mm	B in	C mm	C in	
T-2000	2000	59 - 80 112 - 150	16	1103	4 XPC	2237	88"	1531	60"	1200	47"	1000
T-2300	2300	66 - 90 112 - 150	20	1198	4 XPC	2537	100"	1531	60"	1200	47"	1000
T-2500	2500	70 - 95 112 - 150	20	1260	4 XPC	2737	108"	1531	60"	1242	49"	1000
T-2800	2800	74 - 100 112 - 150	28	1367	4 XPC	3037	120"	1531	60"	1242	49"	1000
T-3000	3000	81 - 110 112 - 150	28	1424	4 XPC	3237	127"	1531	60"	1242	49"	1000
T-3200	3200	88 - 120 112 - 150	32	1495	4 XPC	3437	135"	1531	60"	1276	50"	1000
T-3600	3600	93 - 125 112 - 150	32	1594	4 XPC	3837	151"	1531	60"	1276	50"	1000
T-3800	3800	96 - 130 112 - 150	32	1687	4 XPC	4037	159"	1531	60"	1242	49"	1000
T-4000	4000	100 - 135 112 - 150	32	1744	4 XPC	4237	177"	1531	60"	1276	50"	1000


OPTIONS



▶ Front chains

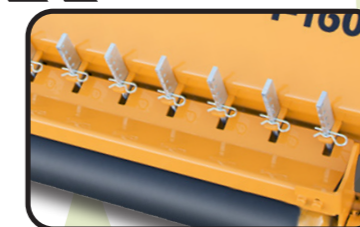


▶ Rear tine retainers

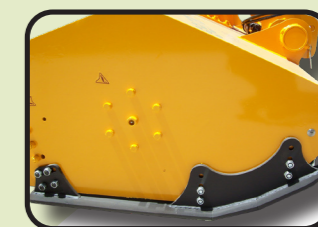

▶ Front adjustable skid shoes



▶ Rear gum

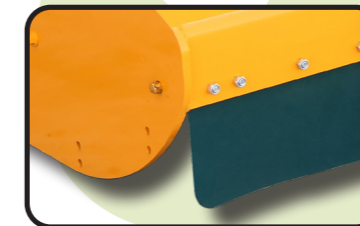

▶ Front gum



▶ Reinforced roller

