



PRO+ SIDE SHIFT

550 POLSER GIROSTOP >



Mulcher for extensive agriculture (maize, sorghum, sunflower, cotton and all kinds of plant residue).

It incorporates rotor POLSER which, thanks to its diameter, is capable of generating a great aspiration and raising the material from the furrow.

Ideal for the regeneration of meadows and grasslands.

Its movable configuration displaces laterally 600 mm of the axis of work by a hydraulic cylinder.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
- ▶ Rotor POLSER of Ø 550 mm.
- ▶ Gearbox SERRAT.
- ▶ 4 XPC side belt transmission.
- ▶ Forged agricultural hammers SERRAT.
- ▶ GIROSTOP system into the bolt of the hammer.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.

- ▶ Front protection curtain.
- ▶ System antiwire in rotor.
- ▶ Double bearing on rear roller.
- ▶ Rear height-adjustable roller.
- ▶ PTO 1,000 rpm.
- ▶ 3 lines of counter hammers.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



System antiwire in rotor



Rear height-adjustable roller



MODEL	mm	KW-HP	KG	Nº BELTS TYPE	A mm-in	B mm-in	C mm-in	
T-2000	2000	74 - 100 112 - 150	16	1360	4 XPC	2237-88"	1434-56"	1235-48" 1000
T-2300	2300	74 - 100 112 - 150	20	1490	4 XPC	2537-100"	1434-56"	1235-48" 1000
T-2500	2500	74 - 100 112 - 150	20	1528	4 XPC	2737-108"	1434-56"	1235-48" 1000
T-2800	2800	81 - 110 112 - 150	28	1590	4 XPC	3037-120"	1470-58"	1242-49" 1000
T-3000	3000	81 - 110 112 - 150	28	1665	4 XPC	3237-127"	1470-58"	1242-49" 1000
T-3200	3200	81 - 110 112 - 150	32	1740	4 XPC	3437-135"	1470-58"	1242-49" 1000
T-3600	3600	93 - 125 112 - 150	32	1890	4 XPC	3837-151"	1531-60"	1276-50" 1000
T-3800	3800	96 - 130 112 - 150	32	1960	4 XPC	4037-159"	1531-60"	1276-50" 1000

OPTIONS

▶ Freewheel




▶ 540 rpm PTO



▶ Front chains



▶ Rear tine retainers

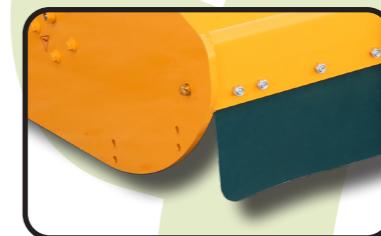

▶ Front adjustable skid shoes



▶ Rear gum




▶ Front gum



▶ Reinforced roller



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com

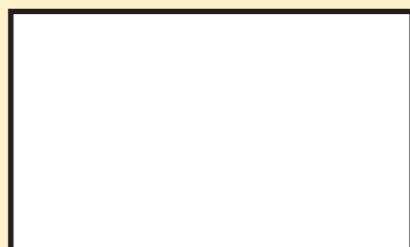

The data presented in this catalog are provided for information purposes only and are not binding.