



Mulcher with reversible hydraulic feeder, ideal for pruning of vineyard, dessert grapes, chestnut-trees, olive trees, almond-trees, citrus fruits, walnuts, hazels, etc.

For tractors between 60 and 90 HP.
Machine for demanding works, with need to deposit very thin remains in the area, avoiding possible plagues and helping to their elimination, for later processes.

It has a rotor of crenellated cleavers, crossing with fixed palate.

CHARACTERISTICS


- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor with system RHENDUEL of Ø 350 mm.
- ▶ Power of tractor between 60 - 90 HP.
- ▶ 3 XPC side belt transmission.
- ▶ Treated blades.
- ▶ Feeder with system BRALAKC.
- ▶ High torque hydraulic motor reversible.
- ▶ Supports of bearing rotor in steel.
- ▶ High speed and high strength bearings.
- ▶ PTO 540 rpm.
- ▶ Double bearing on rear roller.
- ▶ Triple feed chain.
- ▶ Double lines of counter blades RHENDUEL.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.









Feeder BRALAKC

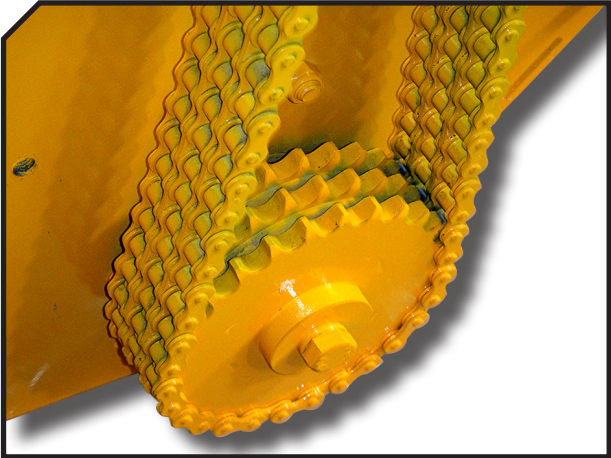

Triple feed chain



MODEL	 mm	 KW-HP		 KG	Nº BELTS TYPE				
						A mm-in	B mm-in	C mm-in	
T-1500	1500	44 - 60 66 - 90	4 x 7	1020	3 XPC	1688-66"	1093-43"	1079-42"	540
T-1700	1700	59 - 80 66 - 90	4 x 8	1105	3 XPC	1888-74"	1093-43"	1079-42"	540

OPTIONS

- ▶ Large knife
- ▶ Reversible
- ▶ Freewheel



▶ Reverse or forward positions



Carretera nacional 240 km. 149,3
22310 Castejón del Puente (Huesca)-España
Tel. (+34) 974 417 830
www.serrat.com - comercial@serrat.com



The data presented in this catalog are provided for information purposes only and are not binding.